

LITTLE WONDER®

P/N 4174094 - KIT - LW BLOWER BRAKE ASSEMBLY INSTRUCTIONS


Intended Use:

The blower brake kit is intended to be used on all metal-bodied Little Wonder Blowers (Push models only). The attachment allows the user to press down on the foot lever and apply pressure on wheel to restrict movement on level surfaces or moderate slopes. The user disengages the brake by pulling up on the lever with their foot.

Kit Contents:

1*	4173814.7	BRKT – BLOWER BRAKE DECK MOUNT
1*	4173810.7	WLDMT – BLOWER STEP BRAKE
2*	4174356	SPRING, TORSION .13 WIRE
2*	4172961	WASHER-UHMW PE 3/8 x 1
4*	64123-50	BLT-HEX 3/8-16 x 1
4*	64229-03	NUT-NYLON LOCK 3/8-16
2	64229-02	NUT-NYLON LOCK 5/16-18
2	64163-55	BLT-HEX 3/8-16 x 2
2	64123-56	BLT-CRG 5/15-18 x 2"
4*	8-18	GRIP RING 3/8"

**Push down with foot
to engage brake**

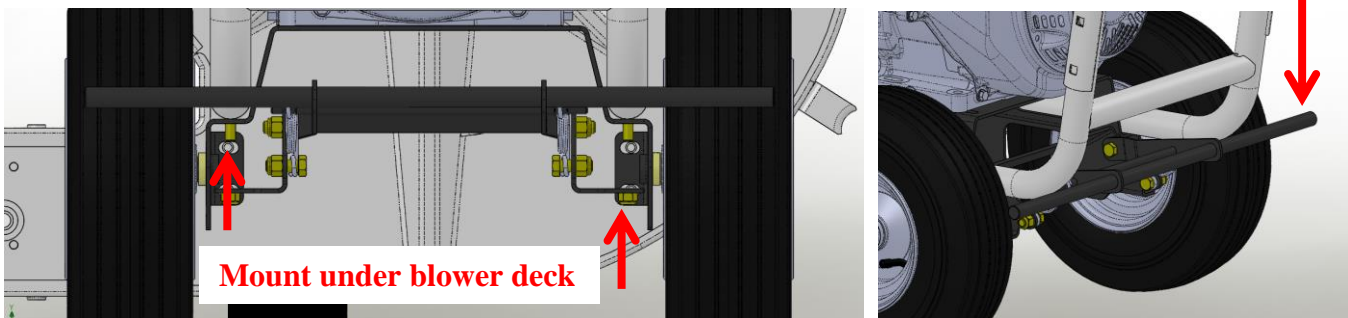

Installation Instructions:

1. Remove the 2 rear bolts that connect the lower handle to the main deck assembly. Discard hardware.
2. Line up brake assembly under blower deck with the brake bar in the up position as shown (should be towards the bend in the lower handle, not the wheel).
3. Use supplied 5/16 hardware to reattach the lower handle to the deck and new brake assembly.
4. Check brake movement by pressing down with foot to engage brake and then lifting up with foot to disengage. If movement is too restricted or too loose, the 3/8-16 bolts in the preassembled brake can be adjusted.