



Swing Away Hitch  
(14HP & 18HP only)



Safety Kit available for all  
trailer units. P/N 010012



LED Light Kit available  
for all models. P/N 010032-1

# TruckLoaders with Bite!

**INDUSTRY LEADING  
DEBRIS REDUCTION  
– UP TO 15 TO 1**

Model No.	8143-06-01	8183-04-01 8184-04-01	8293-04-01 8295-04-01	8353-04-01 8355-04-01	8363-05-01 8365-05-01
Engine	Kohler® Command PRO® CH440	B&S Vanguard™		Yanmar® Diesel	
Displacement*	14HP	18HP	29HP	35HP	36HP
Mount	Skid (standard) (Optional Hitch, Swing-Away and Tailgate)	Skid Mount Swing-Away	Skid Mount Tow Behind		
Hitch Class Requirements	Class III or IV Hitch Required for 2" Square Receiver	Class III Hitch Required for 2" Square Receiver (Skid Mount)	Class III Hitch Required for 2" Square Receiver 2-5/16 Ball Hitch Required for Optional Trailer Mount		
Starter	Pull	Electric / Pull	Electric		
Fuel System	1.85 gal.	1.5 gal.	6 gal.	7 gal.	
Fuel Type	Gas			Diesel	
Battery	N/A	12V	12V	12V	
Impeller	16" Dia., 4 - 5/16" Teethed Steel Blades	20" dia., 4 - 3/8" Teethed Steel Blades		25" dia., 4 - 1/2" Teethed Steel Blades	
CFM	2803	3510	4710	6950	7450
Housing Liners	440 Belt	3/16" Steel	1/4" Steel	1/4" Steel	
Intake Hose	8" x 10'	10" x 10'	12" x 10'	16" x 10'	
Discharge	Polymer 7" x 30"	Metal 7" x 30"	Flex-Tube 8" x 5'	Metal 12" x 6'	
Axle / Suspension	N/A		N/A	N/A	
Tire / Wheel	N/A		Torflex® 2000 lb.	Torflex® 3500 lb.	
			N/A ST205 / 75 D15		
Dry Weight	225 lbs.	460 lbs. 580 lbs.	727 lbs. 1090 lbs.	1155 lbs. 1555 lbs.	1690 lbs. 2090 lbs.



**AUTHORIZED DEALER**

**LITTLE  
WONDER®**

*Get Proven Results. Get Little Wonder.™*

1028 Street Road • Southampton, PA 18966  
1-877-596-6337 • www.littlewonder.com

© 2017 Schiller Ground Care, Inc. All Rights Reserved. 7/2017



14HP Skid



18HP Skid



29HP Tow-Behind



35HP Tow-Behind



36HP Tow-Behind

Make more money with Little Wonder TruckLoaders.


# Big Bite. Even Bigger Profits.

Little Wonder Monster TruckLoaders are all bite, attacking debris with ease. These monstrous machines allow you to fit more in the truck and clear more properties between offloads for higher productivity and more profit.



**INDUSTRY LEADING 15 TO 1 REDUCTION RATIO**

**What makes a Little Wonder TruckLoader a real beast?** A four blade steel impeller with shredding teeth on all three debris touch points provides the best shredding ratio in the industry—**UP TO A MONSTROUS 15 to 1.**

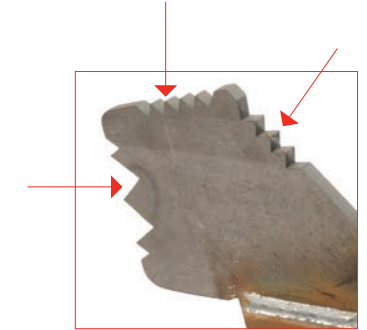

**14 HP**

**FEATURES**

- Kohler® Command PRO® CH440
- 5/16" thick 16" diameter steel teathed impeller
- 2803 cfm
- Tool-free 360-degree discharge chute adjustment
- 8" x 10' Flexible urethane intake hose increases volume
- Polymer discharge chute (with liner) (7" x 30")

**Mounting Options:**

Skid (standard)  
Optional: Hitch, Swing-Away or Tailgate



**18 HP**

**FEATURES**

- 18HP Briggs & Stratton® Vanguard™ engine / electric start
- 3/8" thick 20" diameter steel teathed impeller
- 3510 cfm
- Stack gaskets seal in airflow and lock in debris moisture
- 10" x 10' Flexible urethane intake hose increases volume
- Metal discharge chute (7" x 30")

**Mounting Options:**

Skid or Swing-Away Hitch



**29 HP**

**FEATURES**

- 29HP Briggs & Stratton® Vanguard™ engine / electric start
- 3/8" thick 20" diameter steel teathed impeller
- 4710 cfm
- Stack gaskets seal in airflow and lock in debris moisture
- 12" x 10' Flexible urethane intake hose increases volume
- Flex-Tube discharge chute (8" x 5')

**Mounting Options:**

Skid or Tow-behind



**35 HP**

**FEATURES**

- 35HP Briggs & Stratton® Vanguard™ engine / electric start
- 1/2" thick 25" diameter steel teathed impeller
- 6950 cfm
- Stack gaskets seal in airflow and lock in debris moisture
- 16" x 10' Flexible urethane intake hose increases volume
- Metal discharge chute (12" x 6')

**Mounting Options:**

Skid or Tow-Behind



**36 HP**

**FEATURES**

- 36HP Yanmar® Diesel engine / electric start
- 1/2" thick 25" diameter steel teathed impeller
- 7450 cfm
- Stack gaskets seal in airflow and lock in debris moisture
- 16" x 10' Flexible urethane intake hose increases volume
- Metal discharge chute (12" x 6')

**Mounting Options:**

Skid or Tow-Behind